ORDER NO. AD9004089C0
A2

Service Manual

Equalizer

SH-GE70

Stereo Graphic Equalizer

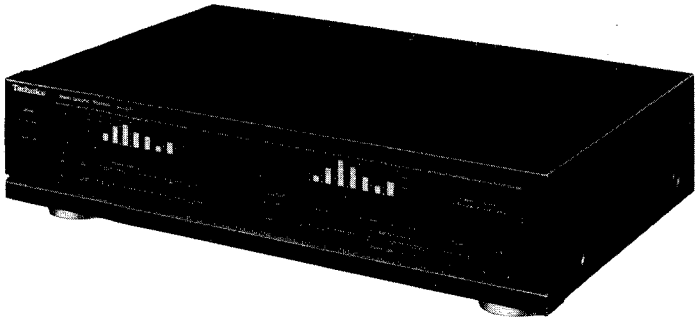

Color

(K) ..... Black Type

Areas

Country Code	Areas	Color
(PP)	U.S.A./Canada	(K)
(E)	Continental Europe	
(EB)	Great Britain	
(EG)	F.R. Germany/Italy	
(GC)	Asia, Latin America, Middle Near East and Africa	
(GN)	Oceania	

SPECIFICATIONS

(DIN 45 500)

Frequency response (centre position) : 5 Hz~100 kHz (−3 dB)
Maximum output voltage : 8 V (1 kHz, THD 0.03%)
Rated output voltage : 1 V
Maximum input voltage : 8 V (1 kHz)
Input sensitivity : 1 V
Rated total harmonic distortion : 0.005% (20 Hz~20 kHz), at 1 V output
0.003% (1 kHz), at 1 V output
Signal-to-noise ratio : 105 dB/1 V, IHF' A
Input impedance : 47 kΩ
Gain : 0±1 dB
Equalization-level controls : +12 dB~−12 dB
(7 frequency ranges, in 2 dB steps)
Centre frequencies : 63 Hz, 160 Hz, 400 Hz, 1 kHz, 2.5 kHz, 6.3 kHz, 12.5 kHz

GENERAL

Power supply
For U.S.A. and Canada : AC 60 Hz, 120 V
For Continental Europe, F.R. Germany and Italy : AC 50 Hz/60 Hz, 220 V
For Great Britain and Oceania : AC 50 Hz/60 Hz, 240 V
For Others : AC 50 Hz/60 Hz, 110 V/127 V/220 V/240 V
Power consumption : 11 W
(with power switch off: 6.5 W)
Dimensions (W×H×D) : 430×102×280 mm
(16 15/16" × 4 1/32" × 11 1/32")
Weight : 2.9 kg (6.4 lb)

Notes:

1. Specifications are subject to change without notice.
2. Weight and dimensions are approximate.
3. Total harmonic distortion is measured by the digital spectrum analyzer.

Technics

Matsushita Services Company Division of Matsushita Electric Corporation of America
50 Meadowland Parkway,
Secaucus, New Jersey 07094

Panasonic Sales Company, Division of Matsushita Electric of Puerto Rico, Inc.
San Gabriel Industrial Park
65th Infantry Ave. Km.9.5
Carolina, P.R. 00630

Matsushita Electric Industrial Co., Ltd.
Central P.O. Box 288,
Osaka 530-91, Japan

Matsushita Electric of Canada Limited
5770 Ambler Drive, Mississauga, Ontario,
L4W 2T3

■ CONTENTS

	Page
SAFETY PRECAUTION	2
ACCESSORIES	2
LOCATION OF CONTROLS	3, 4
CONNECTIONS	5
DISASSEMBLY INSTRUCTIONS	6
BLOCK DIAGRAM	7, 8
SCHEMATIC DIAGRAM	9~13
TERMINAL GUIDE OF IC'S, TRANSISTORS AND DIODES	13
WIRING CONNECTION DIAGRAM	14
PRINTED CIRCUIT BOARDS	15~17
DESCRIPTION OF FL PANEL	18
FUNCTIONS OF IC TERMINALS	19
REPLACEMENT PARTS LIST	20~22
EXPLODED VIEW	23

■ SAFETY PRECAUTION (This "safety precaution" is applied only in U.S.A.)

1. Before servicing, unplug the power cord to prevent an electric shock.
2. When replacing parts, use only manufacturer's recommended components for safety.
3. Check the condition of the power cord. Replace if wear or damage is evident.
4. After servicing, be sure to restore the lead dress, insulation barriers, insulation papers, shields, etc.
5. Before returning the serviced equipment to the customer, be sure to make the following insulation resistance test to prevent the customer from being exposed to a shock hazard.

• INSULATION RESISTANCE TEST

1. Unplug the power cord and short the two prongs of the plug with a jumper wire.
2. Turn on the power switch.
3. Measure the resistance value with ohmmeter between the jumpered AC plug and each exposed metal cabinet part, such as screwheads antenna, control shafts, handle brackets, etc. Equipment with antenna terminals should read between 3MΩ and 5.2MΩ to all exposed parts. (Fig. A) Equipment without antenna terminals should read approximately infinity to all exposed parts. (Fig. B)

Note: Some exposed parts may be isolated from the chassis by design. These will read infinity.

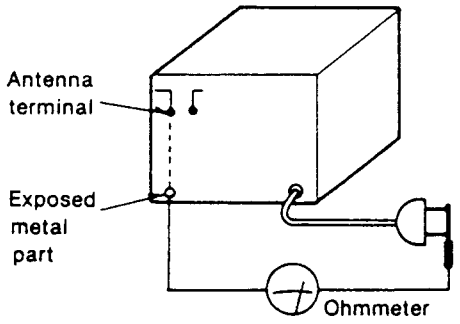

(Fig. A)

Resistance = 3MΩ—5.2MΩ

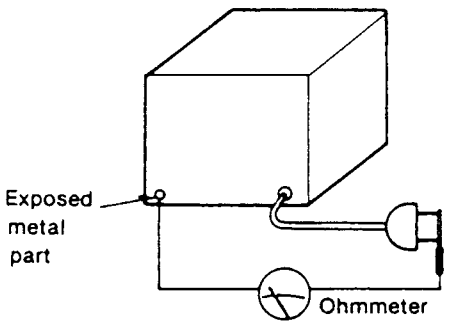

(Fig. B)

Resistance = Approx ∞

4. If the measurement is outside the specified limits, there is a possibility of a shock hazard. The equipment should be repaired and rechecked before it is returned to the customer.

■ ACCESSORIES

- AC power supply cord 1
  - (SJA175) ..... For [PP] area only.
  - (SFDAC05E03) ..... For [E] and [EG] areas.
  - (SJA193) ..... For [EB] area only.
  - (RJA0004) ..... For [GC] area only.
  - (SJA173) ..... For [GN] area only.
- Stereo connection cable 2
  - (SJP2249-3)
- Attachment plug 1
  - (SJP9215) ..... For [GC] area only.

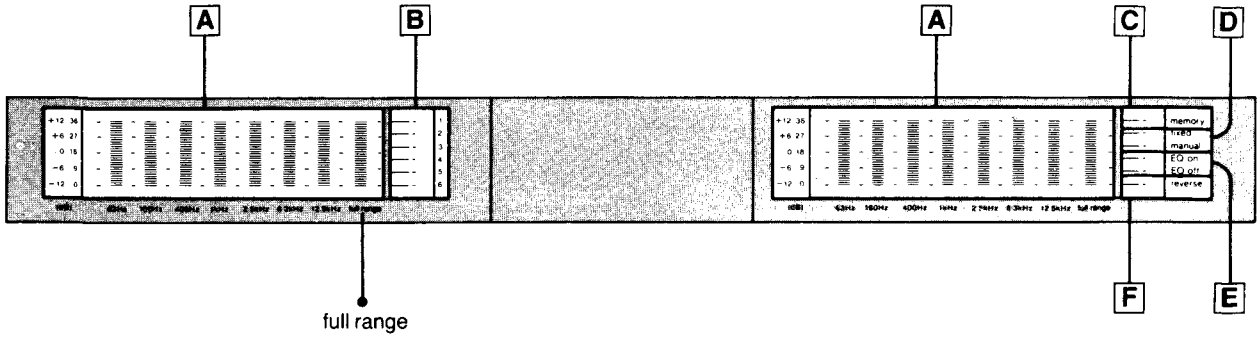

Display section

A Equalization/Spectrum display

The following equalization-level display and three types of spectrum display are possible.

■ Equalization-level display

The amount of correction is displayed by a series of lines (=) for each sound range (frequency range).

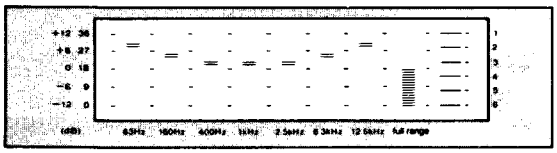

■ Spectrum displays

Bar-type display

This display can be used to show the output strength for each sound range (frequency range), and to show the output strength of sound for all ranges (full range) by a bar-type display.

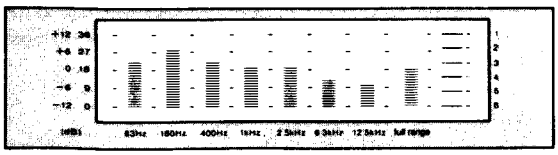

Dot display

Only the upper two parts of the bar display are shown, thus making the strength of the sound for each sound range even easier to see.

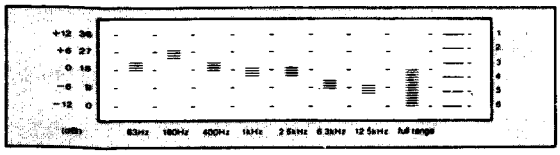

Peak-hold display

The peak sound value of each sound range is held on the display for about two seconds after it occurs.

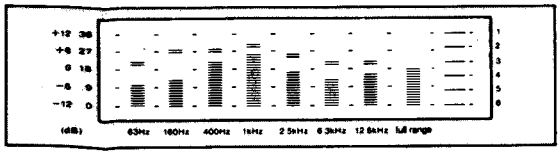

Note:

If an equalization level-control or the memory-mode selector or a preset-memory button is pressed during any display other than the equalization-level display, the equalization-level display will be shown for about five seconds, after which the former display will return.

B Equalization-preset indicators (1–6)

The indicator corresponding to the pressed preset-memory button will illuminate.

manual: Indicates an equalization curve that you programmed into the memory.

fixed: Indicates one of the six equalization curves that were originally programmed into the memory.

C Equalization-memory indicator (memory)

This indicator illuminates when the memory button is pressed, thus indicating that an equalization curve can be programmed into the memory.

D Memory-mode indicators

fixed: Indicates that one of the equalization curves that were originally programmed into the memory can be retrieved.

manual: Indicates that an equalization curve that you programmed into the memory can be retrieved.

E Equalization-mode indicators

EQ on: Indicates that the equalization effect has been switched ON.

EQ off: Indicates that the equalization effect has been switched OFF.

F Reverse indicator (reverse)

This indicator illuminates when the reverse button is pressed, thus indicating that an equalization curve is reversed. Note, however, that there will be no illumination if the equalization curve is flat.

■ LOCATION OF CONTROLS

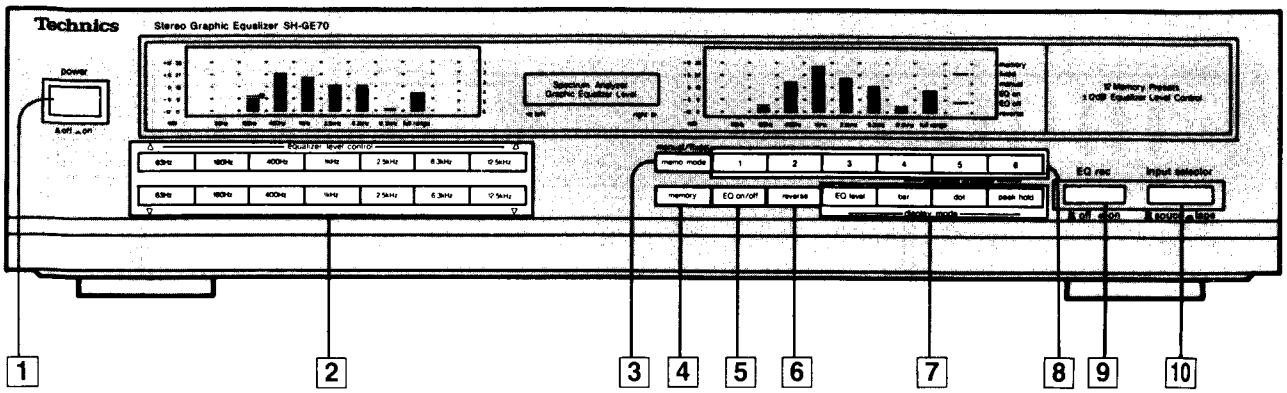

Control section

1 Power switch (power ▮ off ▂ on)

"Power-through" function
Discs, radio broadcasts, etc. can be heard even if the power of this unit is switched OFF.
Note, however, that the power plug should be left connected to the AC outlet.

2 Equalizer level-control buttons (equalizer level control)

These buttons are used for adjustment of the equalization level of the left channel and right channel simultaneously.

Upper row: These buttons are used to increase the level of each sound range (frequency range).

Lower row: These buttons are used to reduce the level of each sound range (frequency range).

3 Memory mode-select button (memo mode)

This button is used to select the equalization memory mode to be used.

manual: Select this mode to program a desired curve to the unit's memory or to retrieve a curve that you have programmed.

fixed: Select this mode to retrieve a curve that was originally pre-programmed to the unit's memory.

4 Memory button (memory)

This button is used to program the equalization curve into the memory.

5 Equalization mode-select button (EQ on/off)

This button is used to switch the equalization correction function "EQ on" and "off". Each time a button is pressed, the mode changes alternately to one or the other of the following modes.

EQ on: Select this mode to make an equalization correction.

EQ off: Select this mode if no equalization correction is desired.

Note that the "EQ on" mode is automatically selected if a preset-memory button or an equalizer level-control button is pressed while this button is set to the "EQ off" mode.

6 Reverse button (reverse)

This button is used to reverse the equalization curve shown in the display.

7 Display mode-select buttons (display mode)

These buttons are used to select the equalization-level display mode and any of the three types of spectrum display mode described below.

■ Equalization-level display mode

EQ level: Select this mode when you want to display the equalization level.

■ Spectrum display modes (spectrum analyzer)

bar: Select this mode when you want a bar-type display.

dot: Select this mode when you want a dot-type display.

peak hold: Select this mode when you want the peak to be held in the display.

8 Preset-memory buttons (1–6)

These buttons are used to program an equalization curve into the memory, or to retrieve a curve originally programmed into the unit's memory.

9 Recording mode selector (EQ rec ▮ off ▂ on)

on: Set to this position to make a tape recording of the source while controlling the frequency response.

off: Set to this position to record without equalizer correction.

10 Input selctor (▮ source ▂ tape)

source: Set to this position to listen to the radio or a compact disc, etc.

tape: Set to this position to listen to a tape deck connected to the back of this unit.

■ CONNECTIONS

Make connections in the numbered sequence by using the included cables.

1 Connect the stereo connection cables.

The illustration below shows an example of connections made when this unit is combined with a Technics electronic component system, and shows only the connections to be made to and from this unit in that combination.

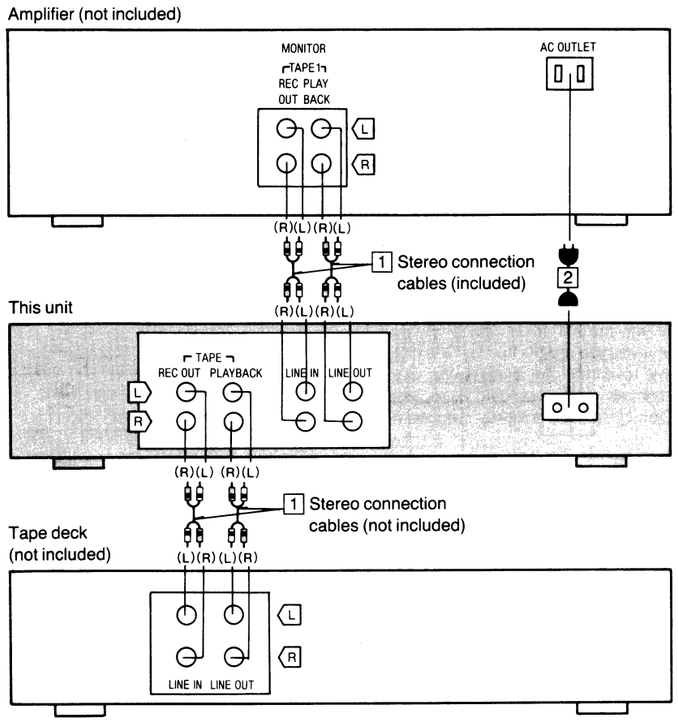

2 Connect the AC power supply cord.

■ DISASSEMBLY INSTRUCTIONS

"ATTENTION SERVICER"
Some chassis components may have sharp edges. Be careful when disassembling and servicing.

Ref. No. 1 — Removal of the Cabinet

Procedure 1

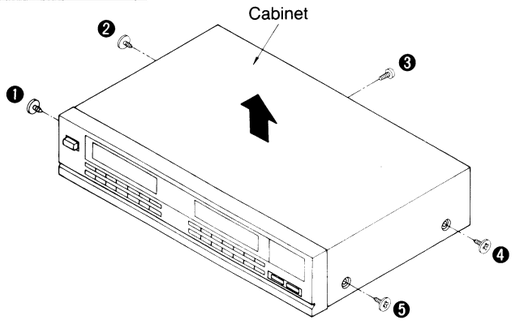

●Remove the 5 screws (❶~❺).

Ref. No. 2 — Removal of the Front Panel

Procedure 1→2

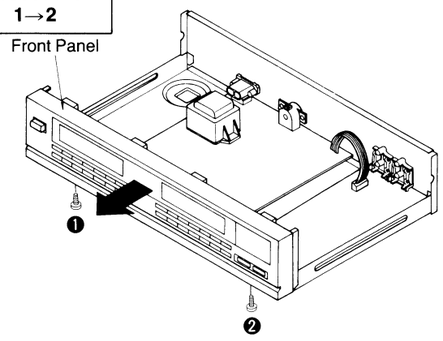

1. Remove the 2 screws (❶, ❷).
2. Remove the front panel in the direction of the arrow.

Ref. No. 3 — Removal of the FL Drive P.C.B.

Procedure 1→2→3

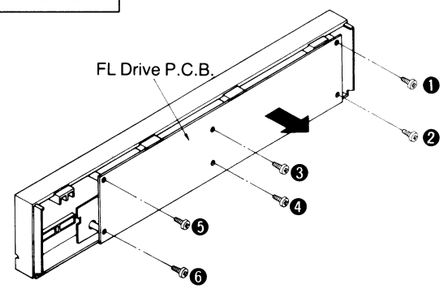

1. Remove the 6 screws (❶~❻).
2. Remove the FL drive P.C.B. in the direction of the arrow.

Ref. No. 4 — Removal of the Operation P.C.B.

Procedure 1→2→3→4

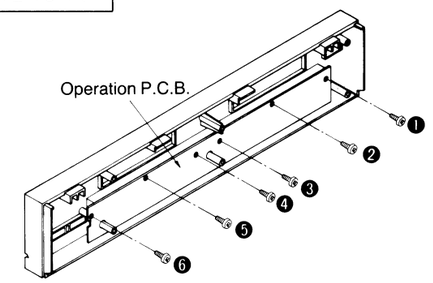

●Remove the 6 screws (❶~❻).

Ref. No. 5 — Removal of the Main P.C.B. and Switch P.C.B.

Procedure 1→2→5

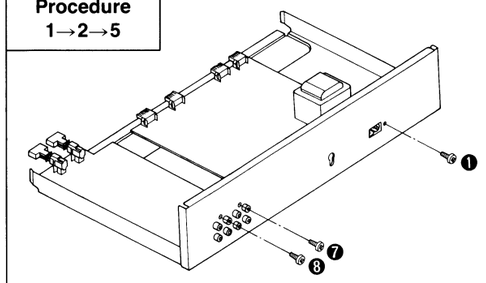

■ Main P.C.B.
1. Remove the 6 screws (❶~❻).
2. Remove the 1 flat cable (CN603).

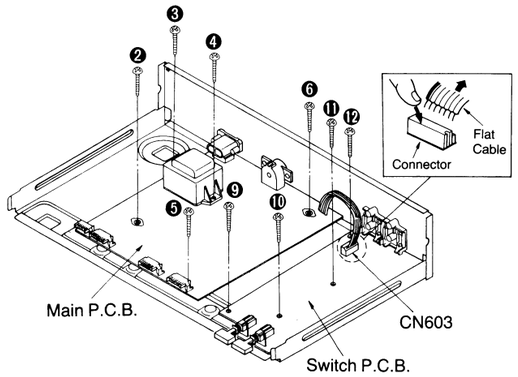

■ Switch P.C.B.
1. Remove the 6 screws (❼~⓬).
2. Remove the 1 flat cable (CN603).

■ BLOCK DIAGRAM

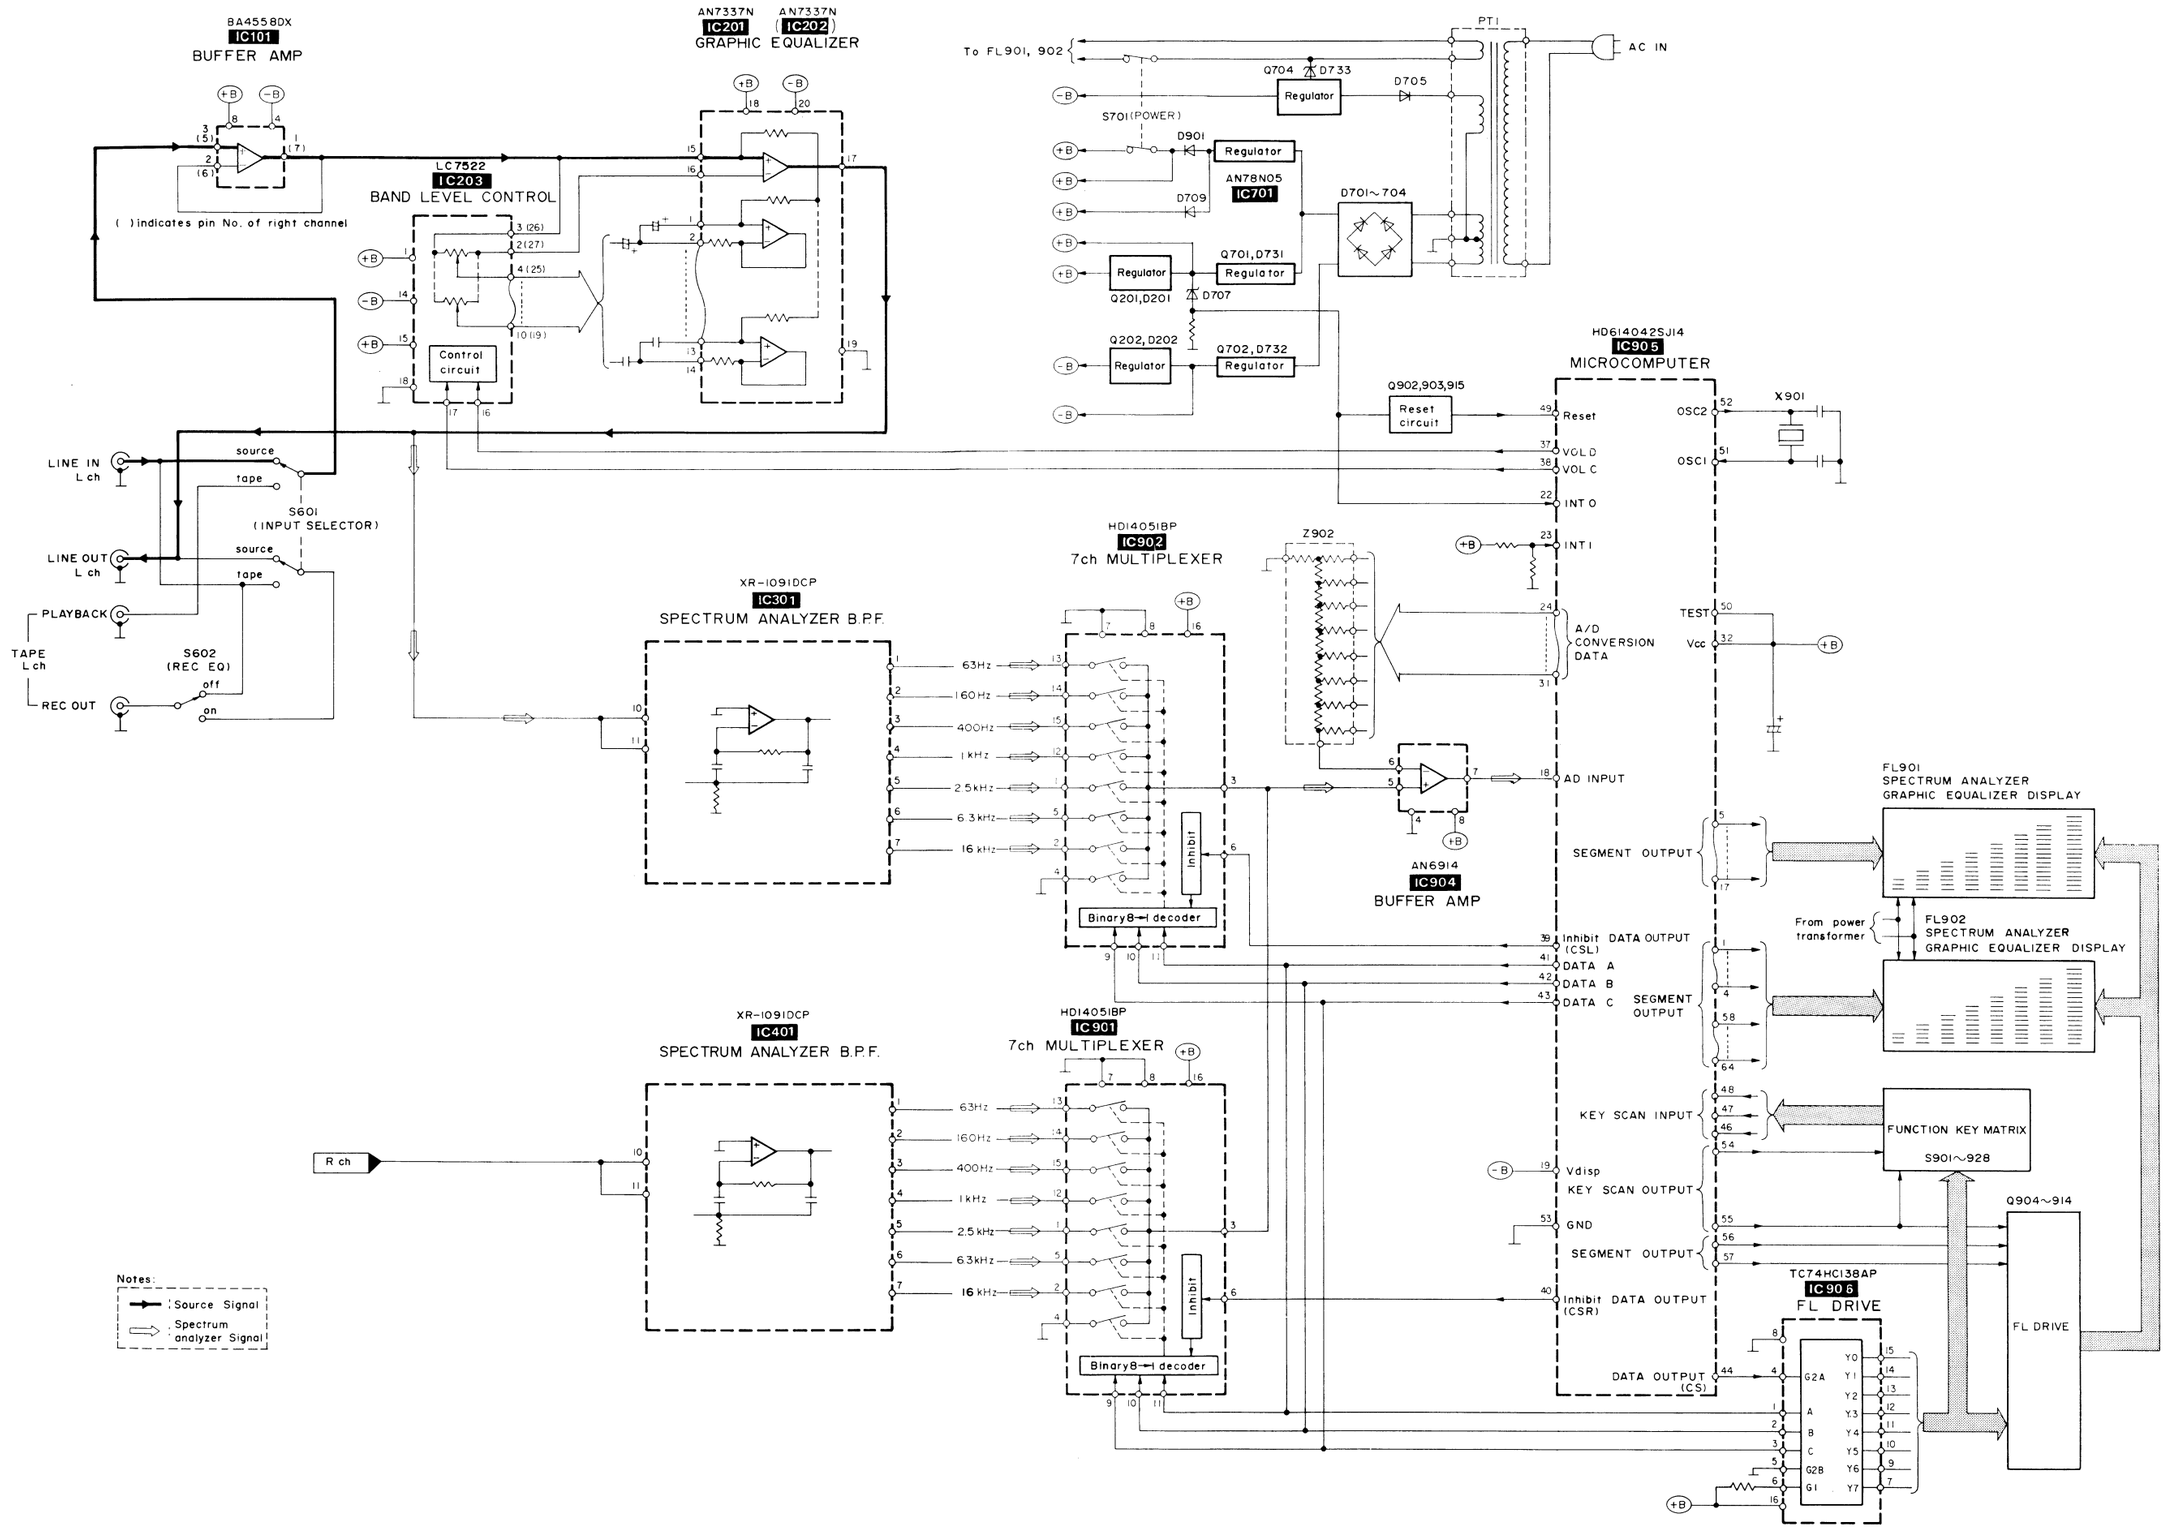

A MAIN CIRCUIT

C FL DRIVE CIRCUIT

IC101 BA4558DX BUFFER AMP

IC201 AN7337N G.EQ AMP

IC203 LC7522 BAND LEVEL CONT.

IC202 AN7337N G.EQ AMP

IC401 XR-1091DCP SPECTRUM ANALYZER B.P.F.& PEAK HOLD

IC301 XR-1091DCP SPECTRUM ANALYZER B.P.F.& PEAK HOLD

IC901 HDI4051B MULTIPLEX

IC902 HDI4051BP MULTIPLEXER

D341 ~ 344 MA165TA

Q201 2SC3311AQSTA REGULATOR

Q202 2SA1309AQSTA REGULATOR

Q704 2SB621AQRSTA REGULATOR

Q702 2SB1357DEFTA REGULATOR

Q701 2SD2037DEFTA REGULATOR

IC701 AN78N05 REGULATOR

LINE IN (JK602-1)

LINE OUT (JK602-2)

TAPE (JK601)

S601 (INPUT SELECTOR)

S602 (REC EQ)

B INPUT/OUTPUT TRERMINAL CIRCUIT

10 11 12 13 14 15 16 17 18 19

L DRIVE CIRCUIT

D OPERATION CIRCUIT

IC901 HD14051BP MULTIPLEXER

IC902 HD14051BP MULTIPLEXER

FL901(RSL0042-F) FL DISPLAY

FL902(RSL0042-F) FL DISPLAY

Q904~914 DTA114ESTP FL DRIVE

IC906 TC74HC138AP FL DRIVE

IC904 AN6914 BUFFER AMP

IC905 HD614042SJ14 MICRO COMPUTER

Q915 DTC143TSTP SWITCHING

Q902 2SC3311AQSTA SWITCHING(RESET)

Q903 DTA114TSTP SWITCHING(RESET)

D901 MA165TA

D904~913 MA165TA

S701 (POWER)

■ SCHEMATIC DIAGRAM (Parts list on pages 20~22.)

(This schematic diagram may be modified at any time with the development of new technology.)

Notes:

- **•S601** : Input selector **(input selector)** switch in **"source"** position.
- **•S602** : Recording mode selector **(EQ rec)** switch in **"off"** position.
- **•S701** : Power switch in **"on"** position.
- **•S702** : Voltage selector switch in **"240 V"** position.
  [110 V/127 V/220 V/240 V]
  For [GC] area only.
- **•S901, S902, S904, S905, S907, S908, S910, S911, S913, S914, S916, S917, S919, S920** : Equalizer level control switches.
  [S901: 63 Hz (up), S902: 63 Hz (down), S904: 160 Hz (up), S905: 160 Hz (down), S907: 400 Hz (up), S908: 400 Hz (down), S910: 1 kHz (up), S911: 1 kHz (down), S913: 2.5 kHz (up), S914: 2.5 kHz (down), S916: 6.3 kHz (up), S917: 6.3 kHz (down), S919: 12.5 kHz (up), S920: 12.5 kHz (down)]
- **•S903** : Equalization mode-select **(EQ on/off)** switch.
- **•S906** : Reverse **(reverse)** switch.
- **•S909, S912, S915, S918** : Display mode-select **(display mode)** switches.
  [S909: EQ level, S912: bar, S915: dot, S918: peak hold]
- **•S921** : Memory mode-select **(memo mode)** switch.
- **•S922, S923, S925~S928** : Preset-memory switches.
  [S922: 1/HEAVY, S923: 2/CLEAR, S925: 3/SOFT, S926: 4/VOKAL, S927: 5/H.P STEREO, S928: 6/CAR STEREO]
- **•S924** : Memory **(memory)** switch.

•Indicated voltage values are the standard values for the unit measured by the DC electronic circuit tester (high-impedance) with the chassis taken as standard. Therefore, there may exist some errors in the voltage values, depending on the internal impedance of the DC circuit tester.

Source signal (L ch) — Spectrum analyzer signal

Positive voltage lines — Negative voltage lines

•Important safety notice:
Components identified by ⚠ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

•Caution!
IC and LSI are sensitive to static electricity.
Secondary trouble can be prevented by taking care during repair.
- •Cover the parts boxes made of plastics with aluminum foil.
- •Ground the soldering iron.
- •Put a conductive mat on the work table.
- •Do not touch the legs of IC or LSI with the fingers directly.

■ TERMINAL GUIDE OF IC'S, TRANSISTORS AND DIODES

AN6914 BA4558DX	XR-1091DCP	HD14051BP TC74HC138AP	AN7337	LC7522	HD614042SJ14
					
AN78N05	2SB621AQRSTA	2SA1309AQSTA 2SC3311AQSTA	2SB1357DEFTA 2SD2037DEFTA	DTA114ESTP DTA114TSTP DTC143TSTP	MA165TA 1SS291TA 1SR35200TB
 1. IN 2. GND 3. OUT					
MA4110MTA MA4150MTA MA4270MTA	MA4051MTA MA4068MTA				
					

■ WIRING CONNECTION DIAGRAM

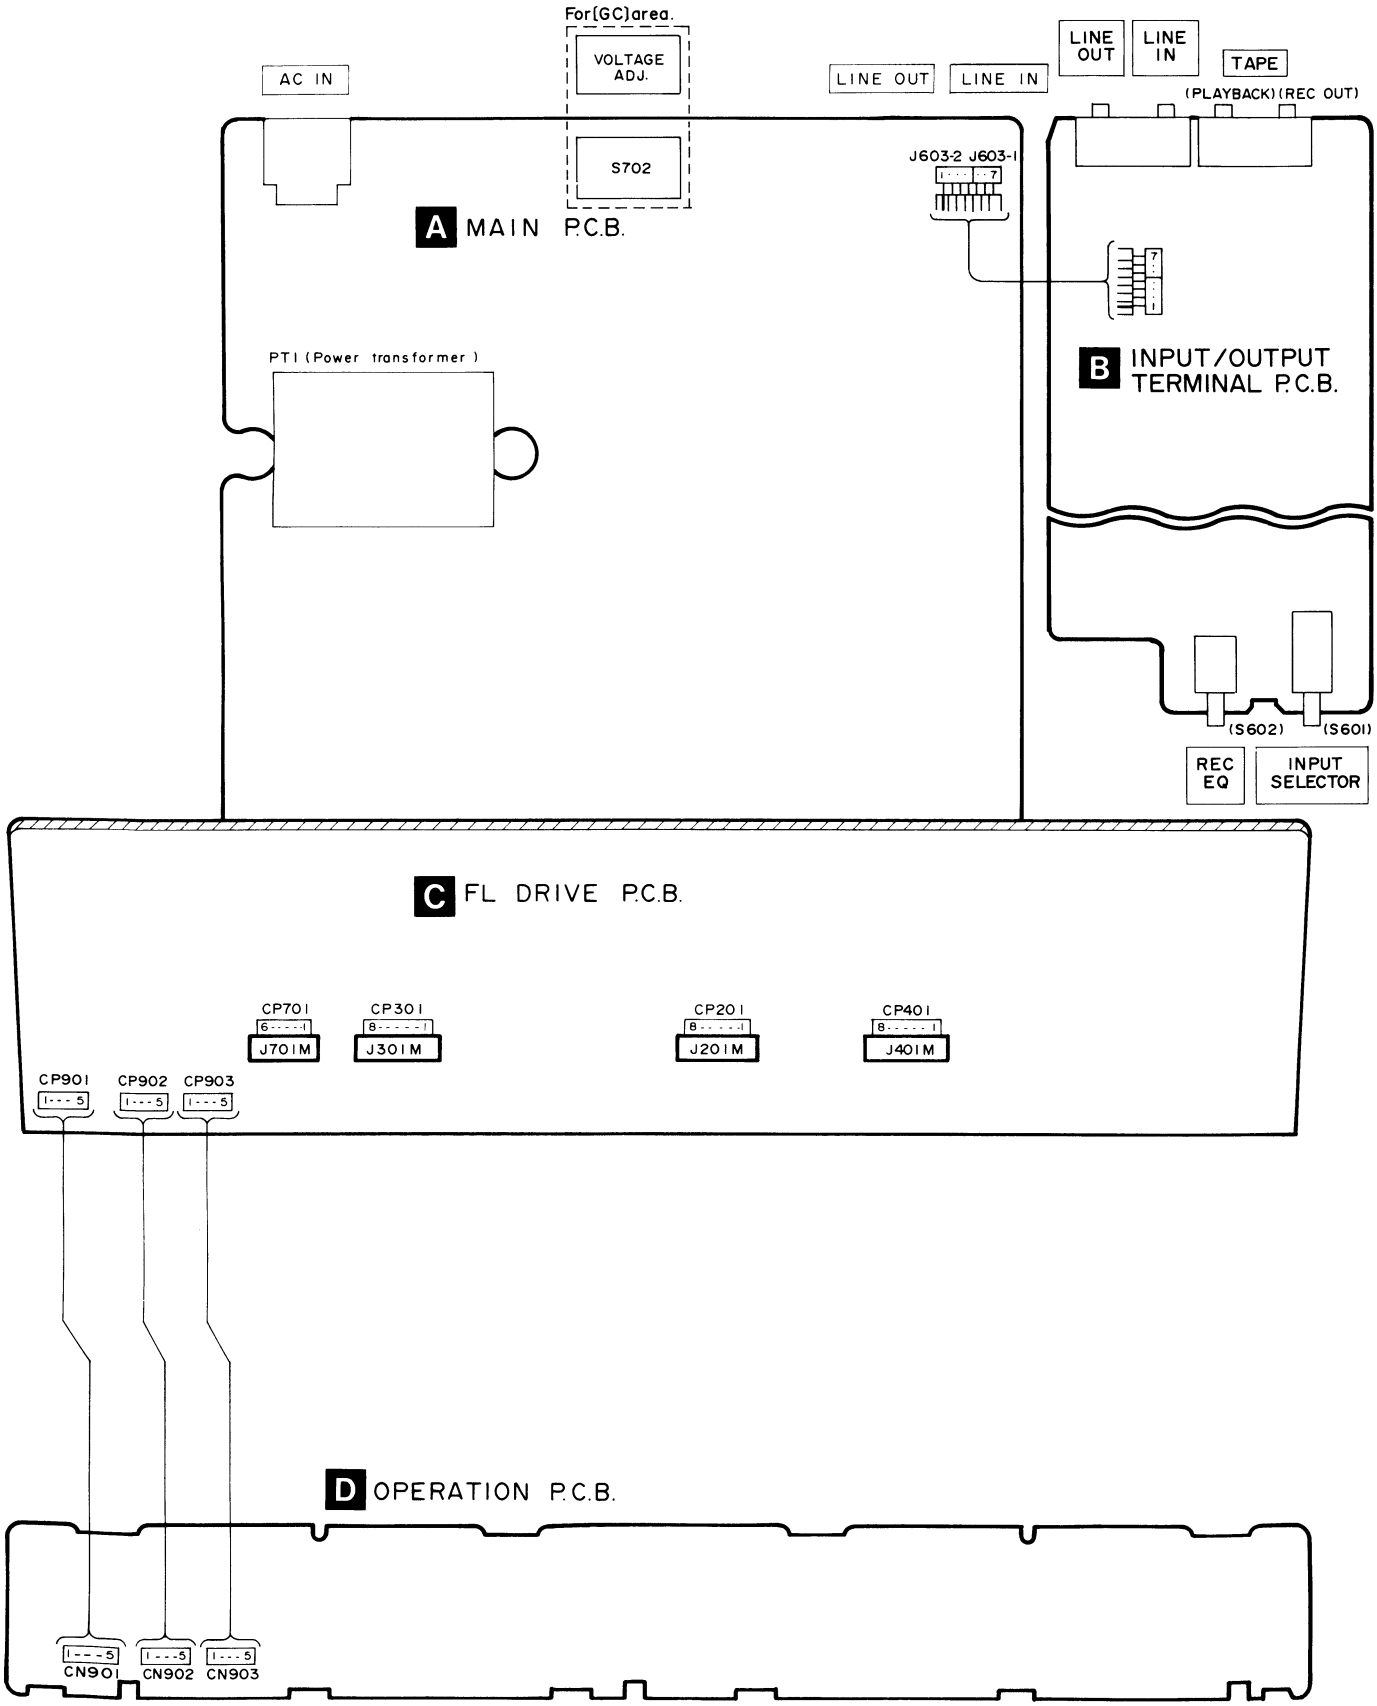

■ PRINTED CIRCUIT BOARDS (Parts list: pages 20~22; Terminal guide: page 13)

A MAIN P.C.B.

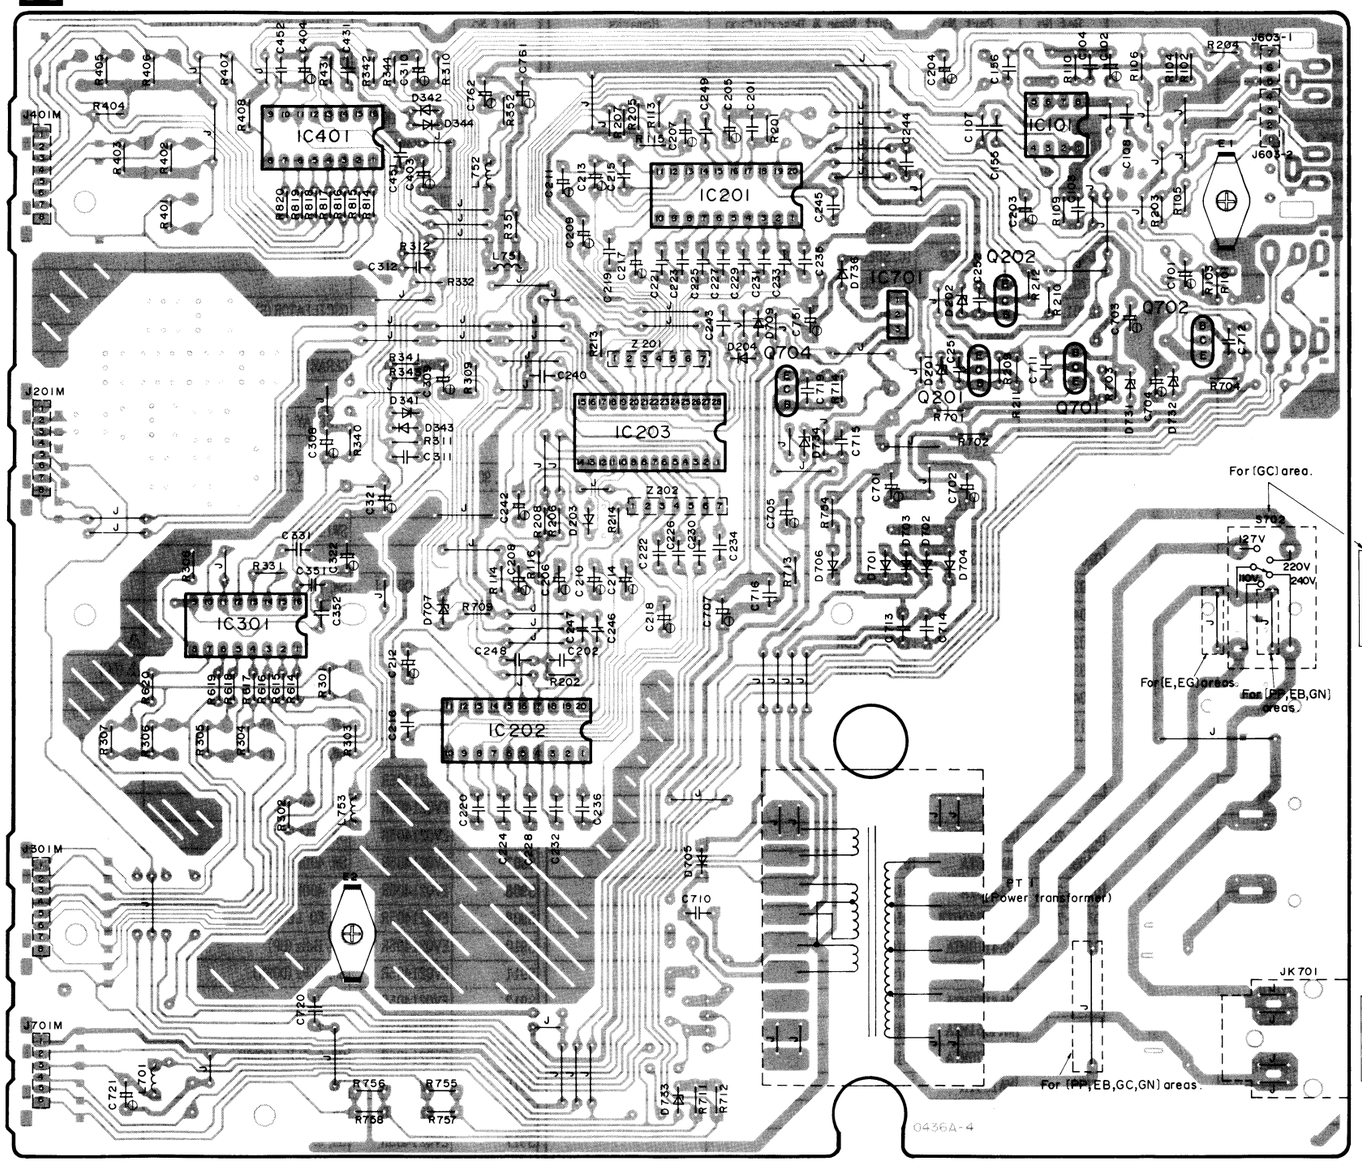

B INPUT/OUTPUT TERMINAL P.C.B.

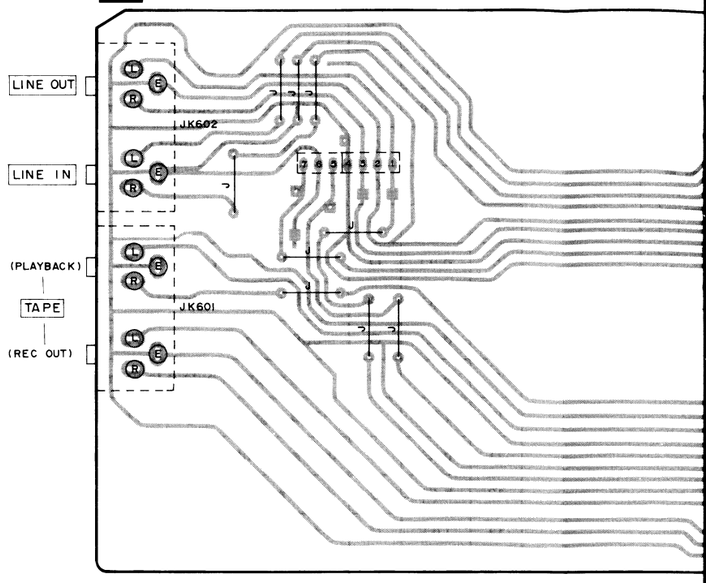

C FL DRIVE P.C.B.

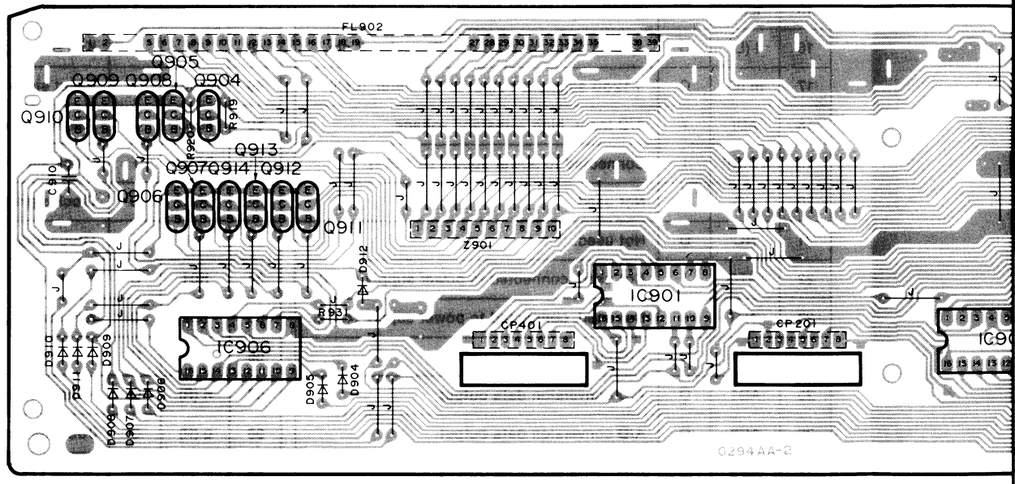

D OPERATION P.C.B.

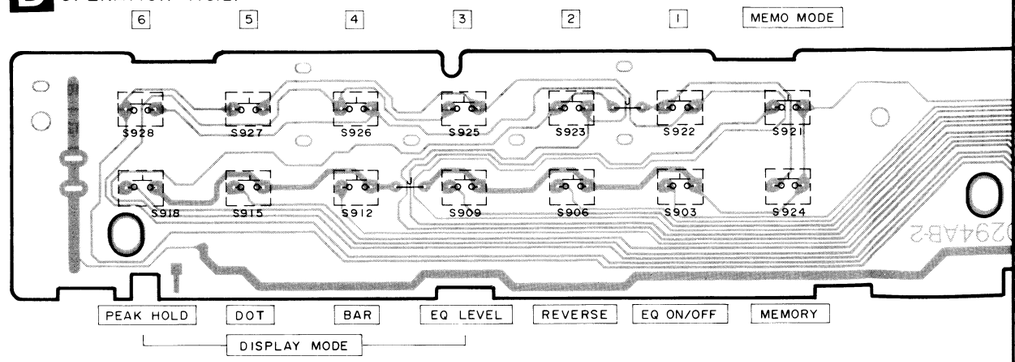

5 6 7 8 9 10 11 12 13 14

B INPUT/OUTPUT TERMINAL P.C.B.

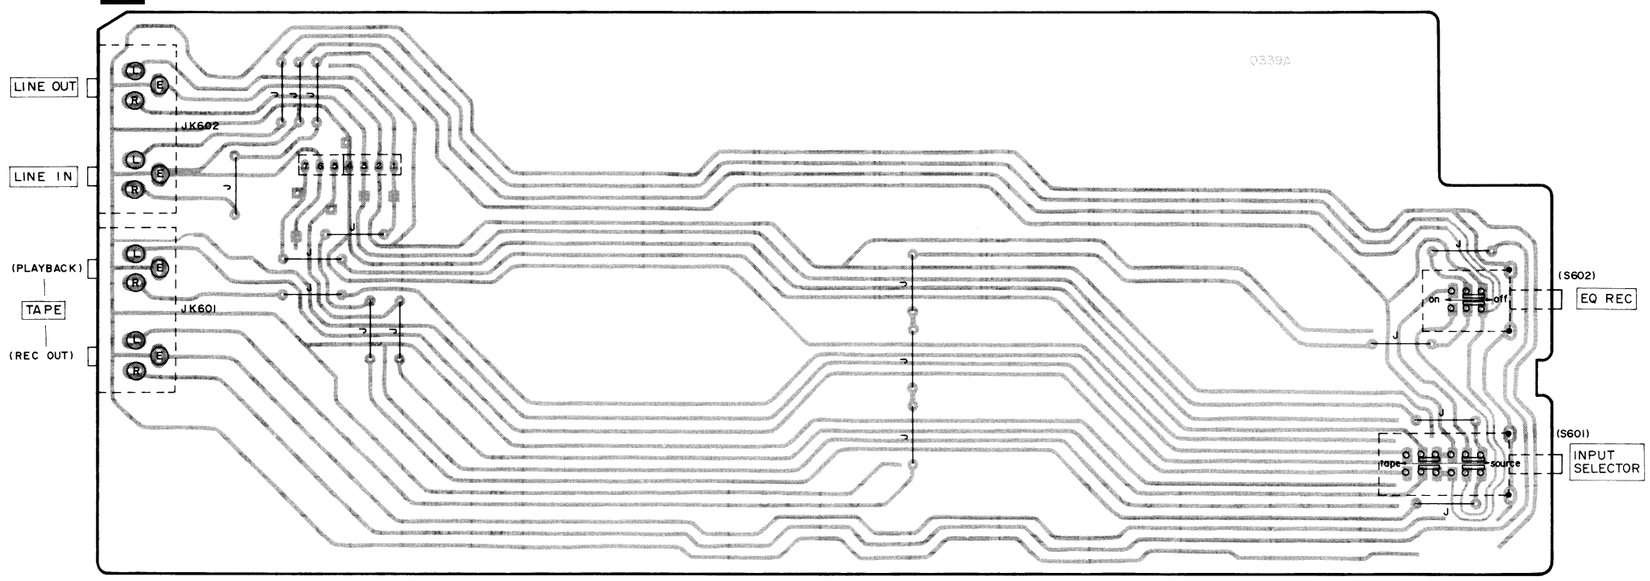

C FL DRIVE P.C.B.

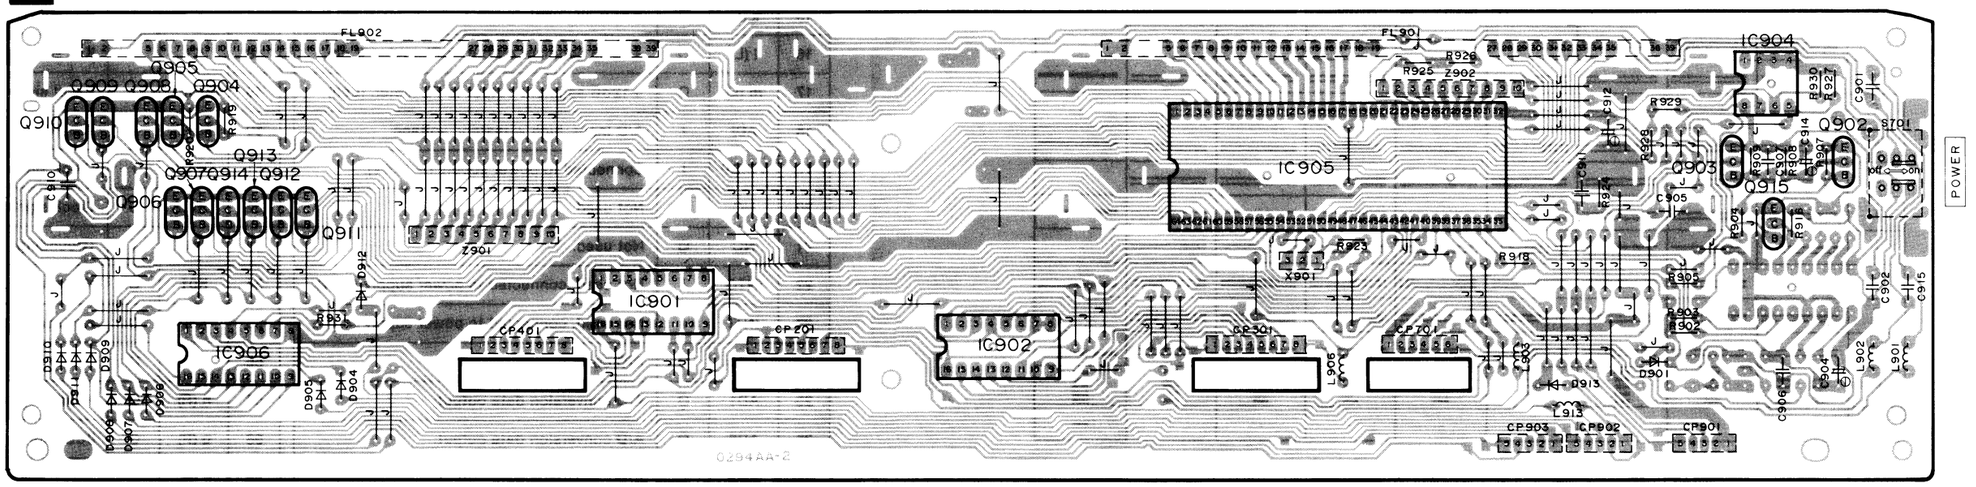

D OPERATION P.C.B.

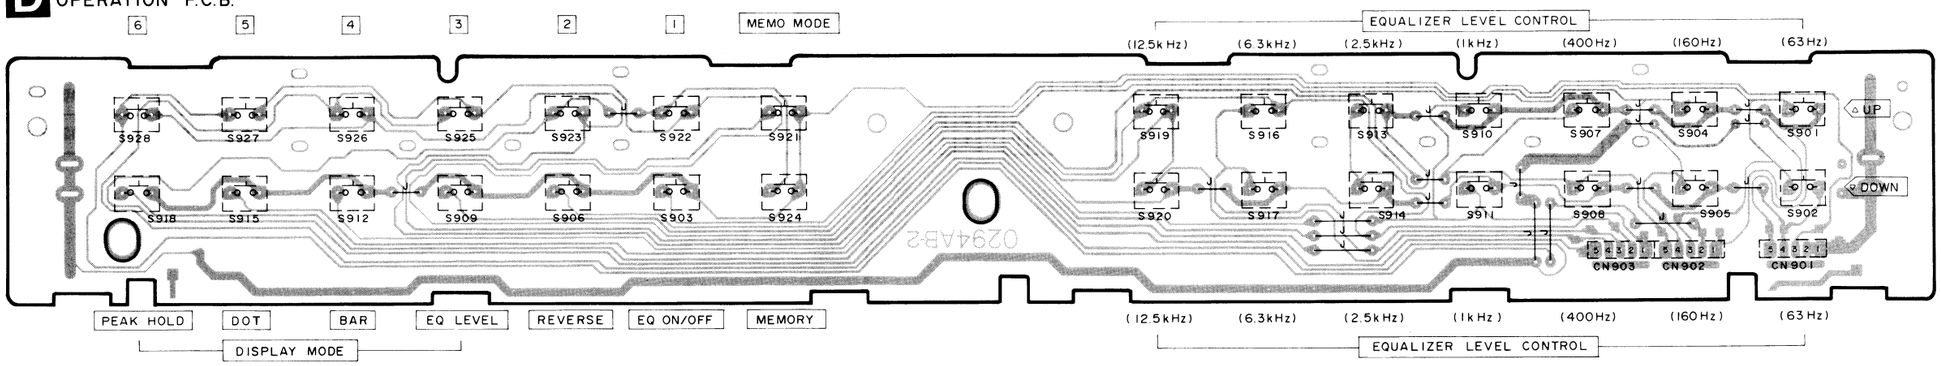

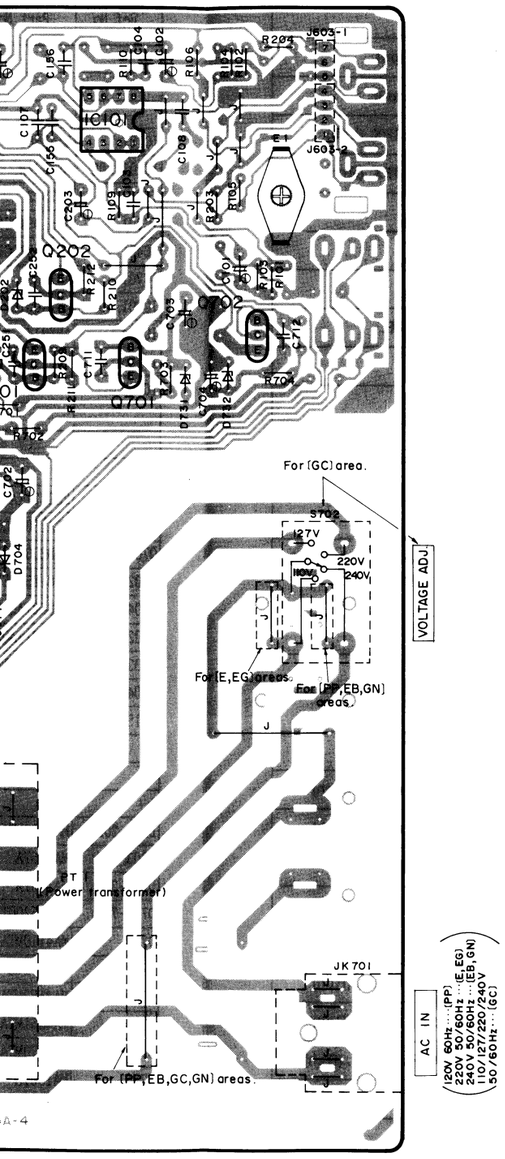

■ DESCRIPTION OF FL PANEL [FL901, 902 (RSL0042-F)]

●GRID ASSIGNMENT

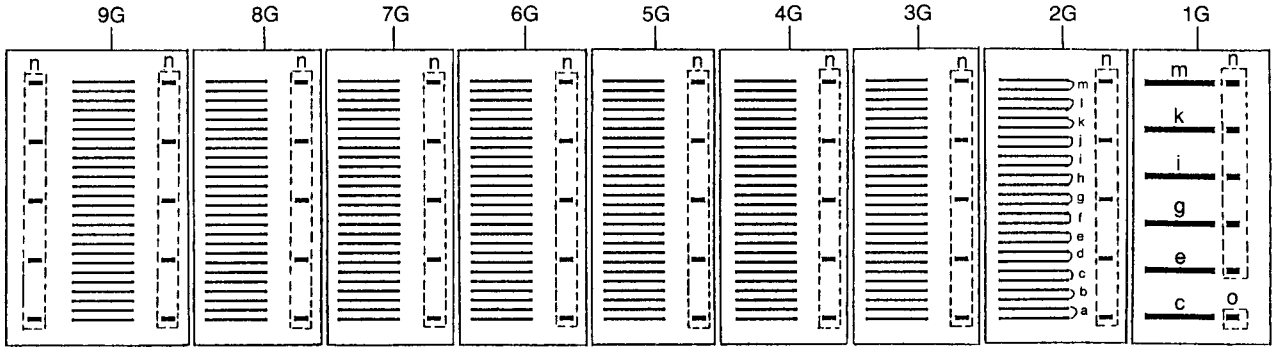

●ANODE CONNECTION

	9 G	8 G	7 G	6 G	5 G	4 G	3 G	2 G	1 G
a	═	═	═	═	═	═	═	═	-
b	═	═	═	═	═	═	═	═	-
c	═	═	═	═	═	═	═	═	▬
d	═	═	═	═	═	═	═	═	-
e	═	═	═	═	═	═	═	═	▬
f	═	═	═	═	═	═	═	═	-
g	═	═	═	═	═	═	═	═	▬
h	═	═	═	═	═	═	═	═	-
i	═	═	═	═	═	═	═	═	▬
j	═	═	═	═	═	═	═	═	-
k	═	═	═	═	═	═	═	═	▬
ℓ	═	═	═	═	═	═	═	═	-
m	═	═	═	═	═	═	═	═	▬
n	≡ ≡	≡	≡	≡	≡	≡	≡	≡	≡
o	-	-	-	-	-	-	-	-	▬

●PIN CONNECTION

PIN NO.	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
CONNECTION	F 2	F 2	NP	NP	9 G	8 G	7 G	6 G	5 G	4 G	3 G	2 G	1 G	NP	NP	NP	NP	NP	NP	NP	o	n	m	ℓ	k	j	i	h	g	f	e	d	c	b	a	NP	NP	F 1	F 1

■ FUNCTIONS OF IC TERMINALS

• IC905 (HD614042SJ14): Microcomputer

Pin No.	Symbol	I/O	Function
1	j (R)	O	+6dB segment output to FL meter. (Rch)
2	k (R)	O	+8dB segment output to FL meter. (Rch)
3	l (R)	O	+10dB segment output to FL meter. (Rch)
4	m (R)	O	+12dB segment output to FL meter. (Rch)
5	a (L)	O	−12dB segment output to FL meter. (Lch)
6	b (L)	O	−10dB segment output to FL meter. (Lch)
7	c (L)	O	−8dB segment output to FL meter. (Lch)
8	d (L)	O	−6dB segment output to FL meter. (Lch)
9	e (L)	O	−4dB segment output to FL meter. (Lch)
10	f (L)	O	−2dB segment output to FL meter. (Lch)
11	g (L)	O	0dB segment output to FL meter. (Lch)
12	h (L)	O	+2dB segment output to FL meter. (Lch)
13	i (L)	O	+4dB segment output to FL meter. (Lch)
14	j (L)	O	+6dB segment output to FL meter. (Lch)
15	k (L)	O	+8dB segment output to FL meter. (Lch)
16	l (L)	O	+10dB segment output to FL meter. (Lch)
17	m (L)	O	+12dB segment output to FL meter. (Lch)
18	ADI	I	A/D input, high withstand voltage.
19	VDISP	I	Connected to power supply (−33.4V).
20	NC	O	Not used.
21	NC	O	Not used.
22	INTO	I	Not used, connected to power supply (5.1V).
23	INTI	I	Not used, connected to power supply (4.4V).
24	AD0	O	A/D conversion data output.
25	AD1	O	A/D conversion data output.
26	AD2	O	A/D conversion data output.
27	AD3	O	A/D conversion data output.
28	AD4	O	A/D conversion data output.
29	AD5	O	A/D conversion data output.
30	AD6	O	A/D conversion data output.
31	AD7	O	A/D conversion data output.
32	VCC	I	5V power supply.

Pin No.	Symbol	I/O	Function
33	SCK	I	Remote control data. Communication data clock input.
34	SD	I	Remote control data. Communication data input.
35	MUT1	O	Not used, connected to power supply (+4.8V).
36	MUT2	O	Muting output.
37	VOLD	O	Data signal of Band Level output.
38	VOLC	O	Clock signal of Band level output.
39	CS (L)	O	Inhibit data signal output to MPX. (Lch)
40	CS (R)	O	Inhibit data signal output to MPX. (Rch)
41	A	O	MPX data output.
42	B	O	MPX data output.
43	C	O	MPX data output.
44	CS	O	Data signal output to FL DRIVE.
45	NC	I	Not used, open.
46	K3	I	Key scan signal input.
47	K2	I	Key scan signal input.
48	K1	I	Key scan signal input.
49	RESET	I	Reset signal input.
50	TEST	—	Test terminal (Connected to power supply 5V).
51	OSC1	I	Clock signal input.
52	OSC2	O	Clock signal output.
53	GND	I	Grounding.
54	K01	O	Key scan signal output.
55	K02	O	Key scan signal output.
56	i (R)	O	+4dB segment output to FL meter. (Rch)
57	h (R)	O	+2dB segment output to FL meter. (Rch)
58	g (R)	O	0dB segment output to FL meter. (Rch)
59	f (R)	O	−2dB segment output to FL meter. (Rch)
60	e (R)	O	−4dB segment output to FL meter. (Rch)
61	d (R)	O	−6dB segment output to FL meter. (Rch)
62	c (R)	O	−8dB segment output to FL meter. (Rch)
63	b (R)	O	−10dB segment output to FL meter. (Rch)
64	a (R)	O	−12dB segment output to FL meter. (Rch)

■ REPLACEMENT PARTS LIST

Notes : * Important safety notice:
Components identified by ⚠ mark have special characteristics important for safety. When replacing any of these components use only manufacturer's specified parts.
* The parenthesized indications in the Remarks columns specify the areas. (Refer to the cover page for area.)
Parts without these indications can be used for all areas.

Ref. No.	Part No.	Part Name & Description	Remarks
		INTEGRATED CIRCUIT(S)	
IC101	BA4558DX	IC, BUFFER AMP.	
IC201, 202	AN7337N	IC, G. EQ AMP.	
IC203	LC7522	IC, BAND LEVEL CONT.	
IC301	XR-1091DCP	IC, SPECTRUM ANALYZER	
IC401	XR-1091DCP	IC, SPECTRUM ANALYZER	
IC701	AN78N05	IC, REGULATOR	
IC901, 902	HD14051BP	IC, MULTIPLEXER	
IC904	AN6914	IC, BUFFER AMP.	
IC905	HD614042SJ14	IC, MICRO COMPUTER	
IC906	TC74HC138AP	IC, FL DRIVE	
		TRANSISTOR(S)	
Q201	2SC3311AQSTA	TRANSISTOR	
Q202	2SA1309AQSTA	TRANSISTOR	
Q701	2SD2037DEFTA	TRANSISTOR	
Q702	2SB1357DEFTA	TRANSISTOR	
Q704	2SB621AQRSTA	TRANSISTOR	
Q902	2SC3311AQSTA	TRANSISTOR	
Q903	DTA114TSTP	TRANSISTOR	
Q904-914	DTA114ESTP	TRANSISTOR	
Q915	DTC143TSTP	TRANSISTOR	
		DIODE(S)	
D201, 202	MA4068MTA	DIODE	
D203, 204	MA165TA	DIODE	
D341-344	MA165TA	DIODE	
D701-706	1SR35200TB	DIODE	⚠
D707	MA4110MTA	DIODE	
D709	1SS291TA	DIODE	
D731, 732	MA4150MTA	DIODE	
D733	MA4051MTA	DIODE	
D734	MA4270MTA	DIODE	
D736	MA165TA	DIODE	
D901	MA165TA	DIODE	
D904-913	MA165TA	DIODE	
		COMPONENT COMBINATION(S)	
Z201, 202	EXBF7E224JYV	COMPONENT COMBINATION	
Z901	EXBF10E104J	COMPONENT COMBINATION	
Z902	EXBF10L795J	COMPONENT COMBINATION	

Ref. No.	Part No.	Part Name & Description	Remarks
		COIL(S)	
L701	ELEPK101KA	COIL	
L751-753	ELEPK4R7KA	COIL	
L901, 902	ELEV4R7KA	COIL	
L903	RLQZP3R3KT-Y	COIL	
L906	RLQZP3R3KT-Y	COIL	
L913	RLQZP3R3KT-Y	COIL	
		OSCILLATOR(S)	
X901	EFOGC4004T4	CERAMIC FILTER	
		DISPLAY TUBE	
FL901, 902	RSL0042-F	DISPLAY TUBE	
		SWITCH(ES)	
S601	RSP3D001-J	SW, INPUT SELECTOR	
S602	RSP3B002-J	SW, REC EQ	
S701	ESB68113	SW, POWER	⚠
S702	SSR187-1	SW, VOLTAGE SELECTOR	⚠(GC)
S901	EVQ21405R	SW, 63Hz (UP)	
S902	EVQ21405R	SW, 63Hz (DOWN)	
S903	EVQ21405R	SW, EQ ON/OFF	
S904	EVQ21405R	SW, 160Hz (UP)	
S905	EVQ21405R	SW, 160Hz (DOWN)	
S906	EVQ21405R	SW, REVERSE	
S907	EVQ21405R	SW, 400Hz (UP)	
S908	EVQ21405R	SW, 400Hz (DOWN)	
S909	EVQ21405R	SW, EQ LEVEL	
S910	EVQ21405R	SW, 1kHz (UP)	
S911	EVQ21405R	SW, 1kHz (DOWN)	
S912	EVQ21405R	SW, BAR	
S913	EVQ21405R	SW, 2. 5kHz (UP)	
S914	EVQ21405R	SW, 2. 5kHz (DOWN)	
S915	EVQ21405R	SW, DOT	
S916	EVQ21405R	SW, 6. 3kHz (UP)	
S917	EVQ21405R	SW, 6. 3kHz (DOWN)	
S918	EVQ21405R	SW, PEAK HOLD	
S919	EVQ21405R	SW, 12. 5kHz (UP)	
S920	EVQ21405R	SW, 12. 5kHz (DOWN)	
S921	EVQ21405R	SW, MEMORY MODE	
S922	EVQ21405R	SW, PRESET(1)	
S923	EVQ21405R	SW, PRESET(2)	
S924	EVQ21405R	SW, MEMORY	

Ref. No.	Part No.	Values & Remarks
C351, 352	ECBT1H102KB5	50V 1000P
C403, 404	ECEA1AK330B	10V 33U
C431	ECQM1H102KV3	50V 1000P
C451, 452	ECBT1H102KB5	50V 1000P
C701, 702	ECEA1VU221B	35V 220U
C703, 704	ECEA1CU101B	16V 100U
C705	ECEA1HU221B	50V 220U
C707	ECEA1CK100B	16V 10U
C710	ECKR1H223ZF5	50V 0.022U

Ref. No.	Part No.	Values & Remarks
C711, 712	ECKR1H103ZF5	50V 0.01U
C713-716	ECKR1H223ZF5	50V 0.022U
C719	ECKR1H103ZF5	50V 0.01U
C720	ECKR1H102ZF5	50V 1000P
C721	ECEA0JK101B	6.3V 100U
C751	ECEA0JU102B	6.3V 1000U
C761	ECEA1AK221B	10V 220U
C762	ECEA1CK100B	16V 10U
C901, 902	ECKR1H103ZF5	50V 0.01U

Ref. No.	Part No.	Values & Remarks
C904	ECEA0JK470B	6.3V 47U
C905	ECKR1H223ZF5	50V 0.022U
C906	ECKR1H103ZF5	50V 0.01U
C907	ECKR1H223ZF5	50V 0.022U
C910	ECKR1H102KB5	50V 1000P
C911	ECKR1H223ZF5	50V 0.022U
C912	ECEA0JU471B	6.3V 470U
C914	ECEA1EK4R7B	25V 4.7U
C915	ECKR1H102KB5	50V 1000P

Ref. No.	Part No.	Part Name & Description	Remarks
		CABINET PARTS	
1	RKM0114-K	CABINET	
2	SNE2129-1	SCREW	
3	XTBS3+8JFZ1	SCREW	
4	RGR0082B-A	REAR PANEL	(PP)
4	RGR0082B-B	REAR PANEL	(E)
4	RGR0082B-C	REAR PANEL	(EB/GN)
4	RGR0082B-D	REAR PANEL	(EG)
4	RGR0082C-A	REAR PANEL	(GC)
5	RFKJT610LE-K	CHASSIS ASS'Y	
5-1	RKA0009-1	FOOT	
6	RFKGHGE70PPK	FRONT PANEL ASS'Y	(PP)
6	RFKGHGE70E-K	FRONT PANEL	(E, EB, EG, GC, GN)
7	RGU0030	POWER BUTTON	
8	RGU0359A-K1	EQ BUTTON(L)	
9	RGU0359B-K1	EQ BUTTON(R)	
10	XTBS26+10J	SCREW	
11	SHE187-2	HOLDER	
12	XTBS3+22F	SCREW	
13	XTB3+20JFZ	SCREW	
14	RMN0043	FL HOLDER(L·R)	
15	RMN0071	FL HOLDER	
16	RGU0163	EQ REC BUTTON	
		PACKING MATELIALS	
P1	RPG0500	CARTON BOX	
P2	RPN0326	PAD	
P3	XZB52X60A01Z	PROTECTION COVER	
P4	SPSD152	ACCESSORIES BOX	

Ref. No.	Part No.	Part Name & Description	Remarks
		ACCESSORIES	
A1	RQF0641	INSTRUCTIONS MANUAL ASS'Y	(PP)
A1	RQF0642	INSTRUCTIONS MANUAL ASS'Y	(E)
A1	RQF0643	INSTRUCTIONS MANUAL ASS'Y	(EB)
A1	RQF0644	INSTRUCTIONS MANUAL ASS'Y	(EG)
A1	RQF0645	INSTRUCTIONS MANUAL ASS'Y	(GC)
A1	RQF0646	INSTRUCTIONS MANUAL ASS'Y	(GN)
A1-1	RQT0524-P	INSTRUCTIONS MANUAL	(PP)
A1-1	RFKSHGE70E-K	INSTRUCTIONS MANUAL	(E)
A1-1	RQT0527-B	INSTRUCTIONS MANUAL	(EB, GN)
A1-1	RQT0528-D	INSTRUCTIONS MANUAL	(EG)
A1-1	RQT0525-G	INSTRUCTIONS MANUAL	(GC)
A1-2	SQX7179	WARRANTY CARD	(PP)
A1-2	RQA0013	WARRANTY CARD	(E, EB, EG)
A1-2	SQX7186	WARRANTY CARD	(GN)
A1-3	SQX9129-1	SERVICENTOR LIST	(PP)
A1-3	RQCB0169	SERVICENTOR LIST	(E, EB, EG, GC, GN)
A1-4	RQA0049	WARRANTY CARD for CANADA	(PP)
A1-5	SQX9131	SERVICENTOR LIST for CANADA	(PP)
A1-6	RQCS0009	CAUTION NOTE for FTZ	(EG)
A2	SJA175	POWER CORD	⚠(PP)
A2	SFDAC05E03	POWER CORD	⚠(E, EG)
A2	SJA193	POWER CORD	⚠(EB)
A2	RJA0004	POWER CORD	⚠(GC)
A2	SJA173	POWER CORD	⚠(GN)
A3	SJP2249-3	PIN CORD	
A4	SJP9215	ATTACHMENT PLUG	⚠(GC)

Ref. No.	Part No.	Part Name & Description	Remarks
S925	EVQ21405R	SW, PRESET(3)	
S926	EVQ21405R	SW, PRESET(4)	
S927	EVQ21405R	SW, PRESET(5)	
S928	EVQ21405R	SW, PRESET(6)	
		JACK(S)	
JK601	SJF3069N	TERMINAL (TAPE IN/OUT)	
JK602	SJF3069N	TERMINAL (LINE IN/OUT)	
JK701	SJSD16	AC INLET	⚠(PP/GN)
JK701	SJS9236	AC INLET	⚠(E, EB, EG, GC)
J603-1	RJS1A1703	CONNECTOR (3P)	
J603-2	RJS1A1704	CONNECTOR(4P)	
J201M	RJU003K008M1	SOCKET(8P)	
J301M	RJU003K008M1	SOCKET(8P)	

Ref. No.	Part No.	Part Name & Description	Remarks
J401M	RJU003K008M1	SOCKET(8P)	
J701M	RJU003K006M1	SOCKET(6P)	
CN901-903	SJS50581BB	SOCKET(5P)	
CP201	RJT003K008M1	CONNECTOR(8P)	
CP301	RJT003K008M1	CONNECTOR(8P)	
CP401	RJT003K008M1	CONNECTOR(8P)	
CP701	RJT003K006M1	CONNECTOR(6P)	
CP901-903	SJT30549BB1	CONNECTOR(5P)	
		TRANSFORMER	
PT1	RTP1K4C006	POWER TRANSFORMER	⚠(PP)
PT1	RTP1K4E010	POWER TRANSFORMER	⚠(E, EB, EG, GC, GN)

Notes : * Capacity valuse are in microfarads (uF) unless specified otherwise, P=Pico-farads(pF) F=Farads(F)
* Resistance values are in ohms, unless specified otherwise, 1K=1,000(OHM) , 1M=1,000k(OHM)

Ref. No.	Part No.	Values & Remarks
		RESISTORS
R101, 102	ERDS2TJ102T	1/4W 1K
R103, 104	ERDS2TJ104T	1/4W 100K
R105, 106	ERDS2TJ1G2T	1/4W 1K
R109, 110	ERDS2TJ104T	1/4W 100K
R113, 114	ERDS2TJ153T	1/4W 15K
R115, 116	ERDS2TJ223T	1/4W 22K
R201, 202	ERDS2TJ153T	1/4W 15K
R203, 204	ERDS2TJ104T	1/4W 100K
R205, 206	ERDS2TJ123T	1/4W 12K
R207, 208	ERDS2TJ224T	1/4W 220K
R209, 210	ERDS2TJ222T	1/4W 2.2K
R211, 212	ERDS1FVJ181T	1/2W 180 ⚠
R213, 214	ERDS2TJ224T	1/4W 220K
R301-308	ERDS2TJ104T	1/4W 100K
R309, 310	ERDS2TJ472T	1/4W 4.7K
R311, 312	ERDS2TJ123T	1/4W 12K
R331	ERDS2TJ152T	1/4W 1.5K
R332	ERDS2TJ103T	1/4W 10K
R340	ERDS2TJ471T	1/4W 470
R341, 342	ERDS2TJ823T	1/4W 82K
R343, 344	ERDS2TJ561T	1/4W 560
R351, 352	ERDS2TJ220T	1/4W 22
R401-408	ERDS2TJ104T	1/4W 100K
R431	ERDS2TJ182T	1/4W 1.8K
R614-620	ERDS2TJ122T	1/4W 1.2K

Ref. No.	Part No.	Values & Remarks
R701, 702	ERD2FCVJ4R7T	1/4W 4.7 ⚠
R703, 704	ERDS2TJ152T	1/4W 1.5K
R709	ERDS2TJ273T	1/4W 27K
R711, 712	ERD25FVJ101T	1/4W 100 ⚠
R713	ERDS2TJ103T	1/4W 10K
R714	ERDS2TJ102T	1/4W 1K
R754	ERD2FCVG470T	1/4W 47 ⚠
R755-758	ERDS1FVJ150T	1/2W 15 ⚠
R814-820	ERDS2TJ122T	1/4W 1.2K
R902-904	ERDS2TJ103T	1/4W 10K
R905	ERDS2TJ102T	1/4W 1K
R907-909	ERDS2TJ332T	1/4W 3.3K
R916	ERDS2TJ222T	1/4W 2.2K
R918	ERDS2TJ472T	1/4W 4.7K
R919, 920	ERDS2TJ104T	1/4W 100K
R923	ERDS2TJ684T	1/4W 680K
R924, 925	ERDS2TJ104T	1/4W 100K
R926	ERDS2TJ103T	1/4W 10K
R927	ERDS2TJ104T	1/4W 100K
R928	ERDS2TJ103T	1/4W 10K
R929	ERDS2TJ473T	1/4W 47K
R930	ERDS2TJ104T	1/4W 100K
R931	ERDS2TJ103T	1/4W 10K
		CAPACITORS
C101, 102	ECEA1EK3R3B	25V 3.3U
C103, 104	ECBT1H101KB5	50V 100P

Ref. No.	Part No.	Values & Remarks
C107, 108	ECBT1E103ZF5	25V 0.01U
C155, 156	ECBT1H102KB5	50V 1000P
C201, 202	ECBT1H121KB5	50V 120P
C203-208	ECEA1EK3R3B	25V 3.3U
C209, 210	ECEA1HK010B	50V 1U
C211, 212	ECEA1HKR22B	50V 0.22U
C213, 214	ECEA1HKR47B	50V 0.47U
C215, 216	ECQV1H823JZ3	50V 0.082U
C217, 218	ECEA1HKR15B	50V 0.15U
C219, 220	ECFR1E333KR	25V 0.033U
C221, 222	ECQV1H683JZ3	50V 0.68U
C223, 224	ECFR1E153KR	25V 0.015U
C225, 226	ECFR1E273KR	25V 0.027U
C227, 228	ECFR1E562KR	25V 5600P
C229, 230	ECFR1E103KR	25V 0.01U
C231, 232	ECFR1E222KR	25V 2200P
C233, 234	ECFR1E472KR	25V 4700P
C235, 236	ECKR1H681KB5	50V 680P
C240	ECBT1E103ZF5	25V 0.01U
C242	ECEA1AK470B	10V 47U
C243-247	ECBT1E103ZF5	25V 0.01U
C248, 249	ECBT1H101KB5	50V 100P
C251, 252	ECBT1E103ZF5	25V 0.01U
C308	ECEA1CK100B	16V 10U
C309, 310	ECEA1EK3R3B	25V 3.3U
C311, 312	ECBT1H101KB5	50V 100P
C321, 322	ECEA1AK330B	10V 33U
C331	ECQM1H102KV3	50V 1000P

■ EXPLODED VIEW

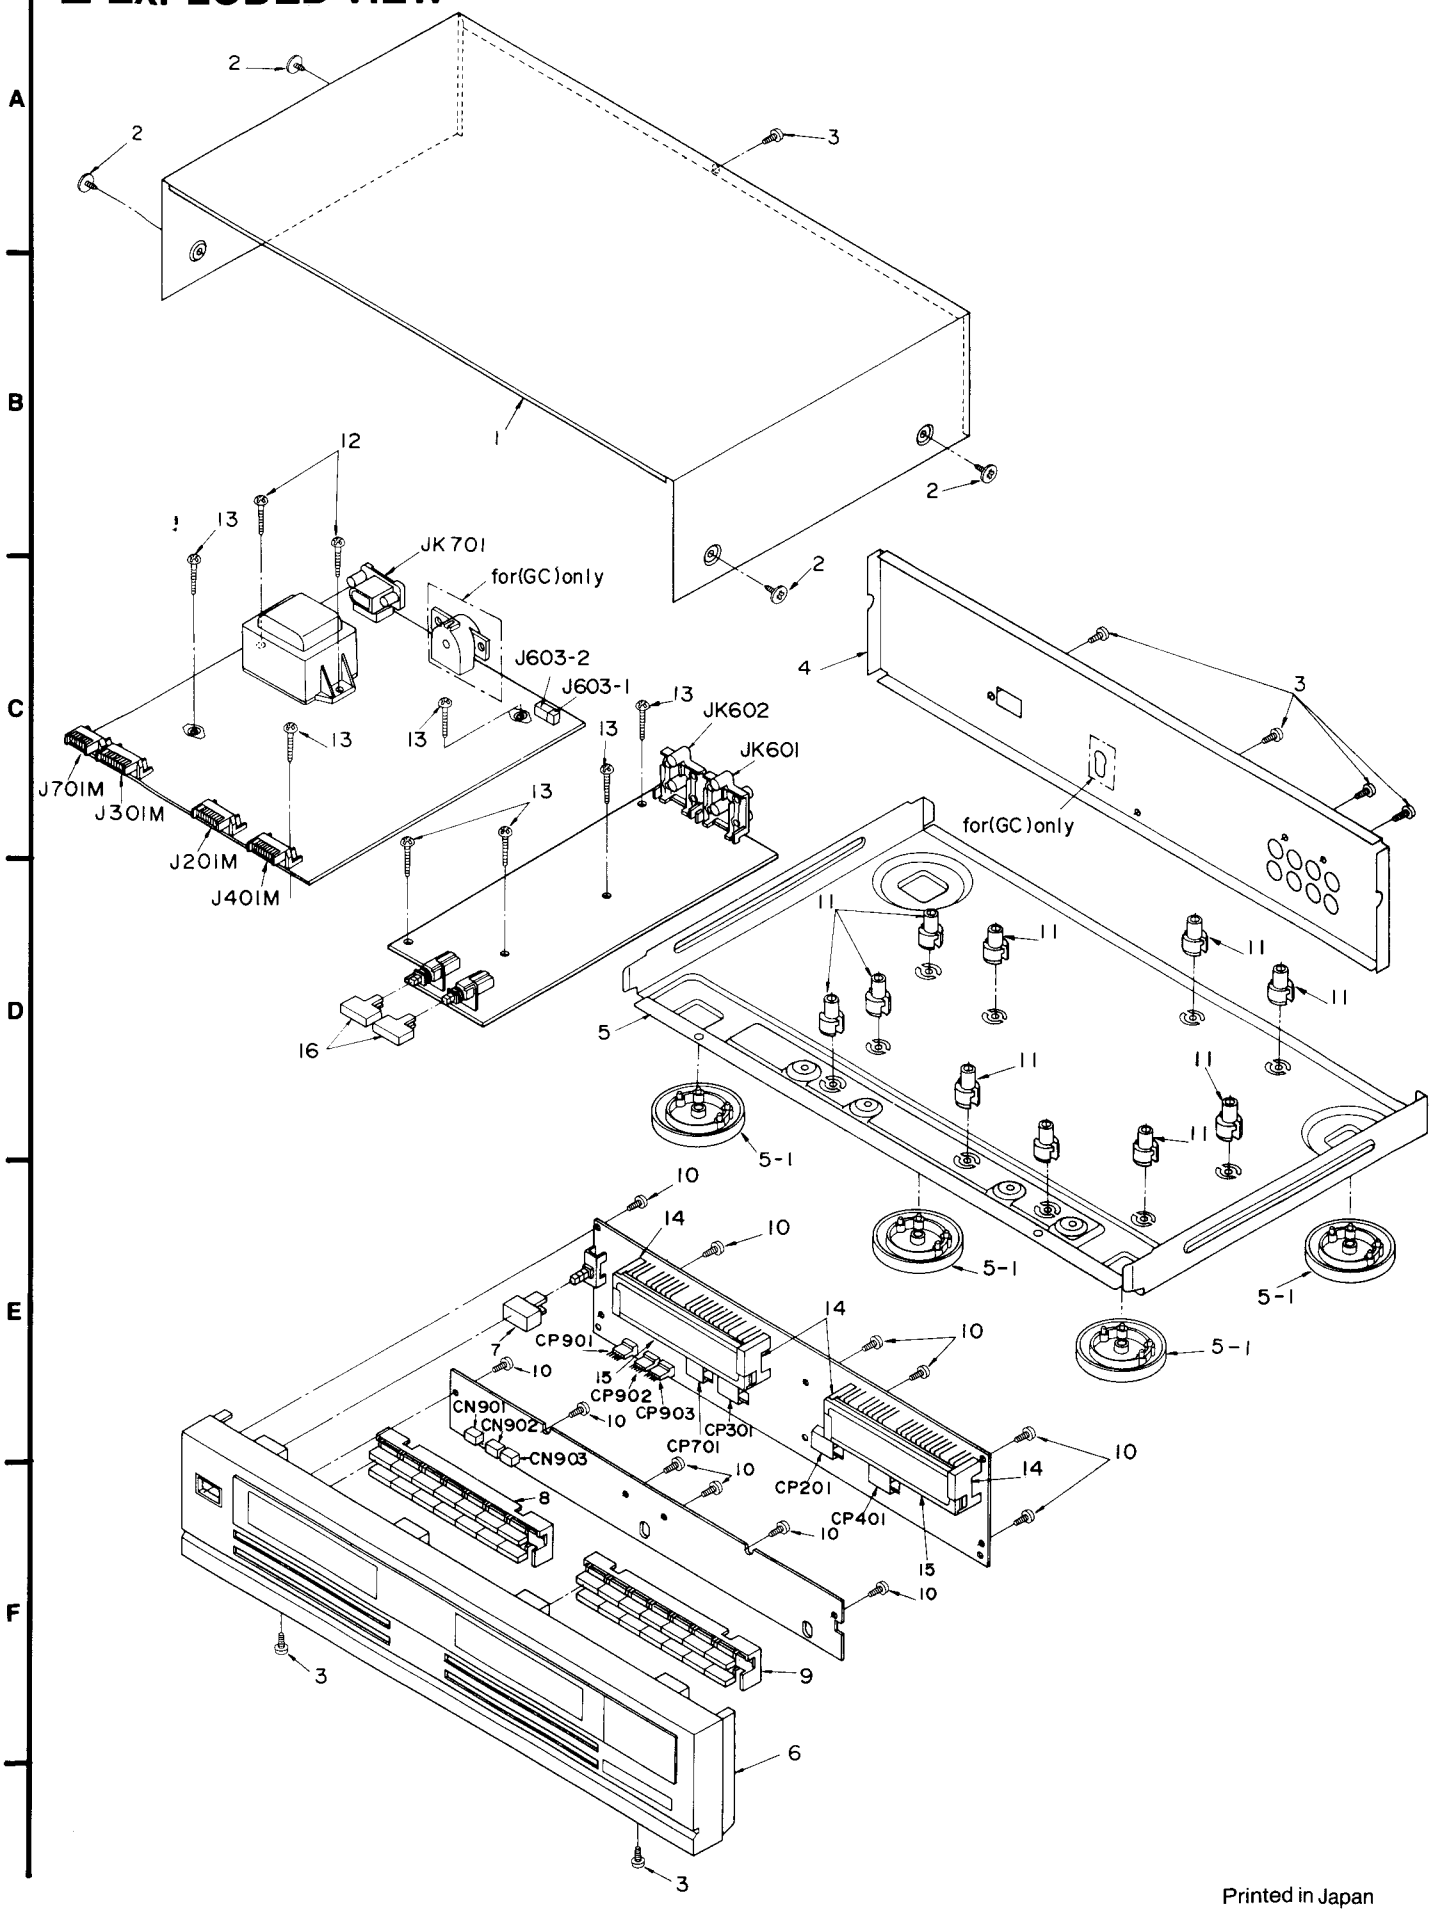

Printed in Japan
F900414500 TW/FF/YY